
Installation Instructions for Top Mount Refrigerator

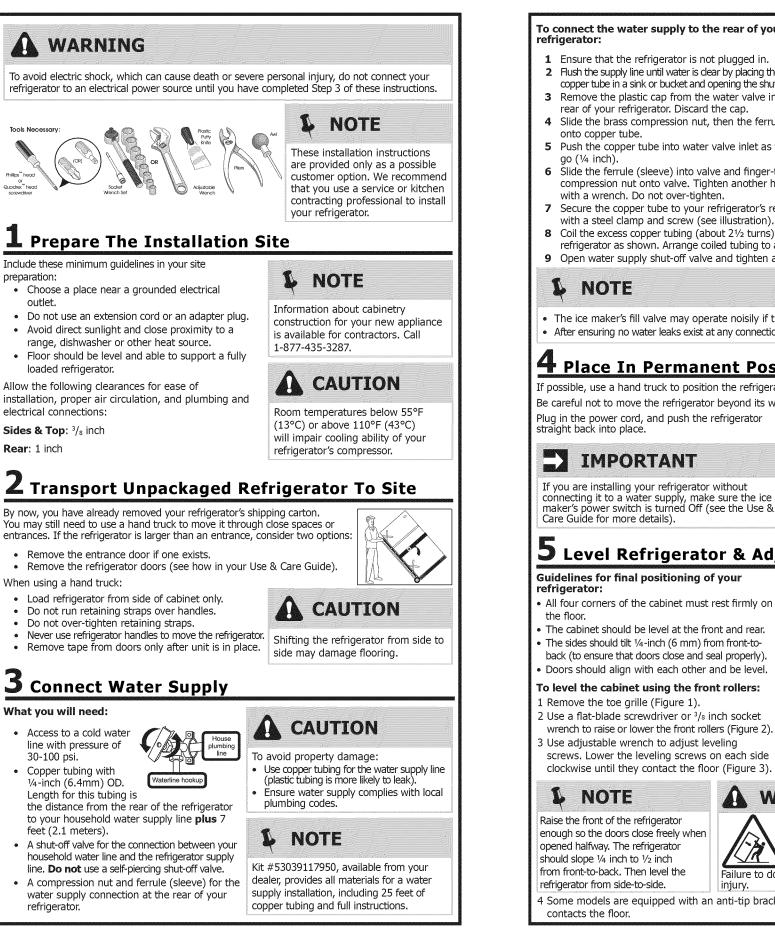

To connect the water supply to the rear of your refrigerator:

- **1** Ensure that the refrigerator is not plugged in. 2 Flush the supply line until water is dear by placing the end of the
- copper tube in a sink or bucket and opening the shut-off valve. **3** Remove the plastic cap from the water valve inlet at the
- rear of your refrigerator. Discard the cap. **4** Slide the brass compression nut, then the ferrule (sleeve) onto copper tube.
- 5 Push the copper tube into water valve inlet as far as it will ao(1/4 inch)
- **6** Slide the ferrule (sleeve) into valve and finger-tighten the compression nut onto valve. Tighten another half turn with a wrench. Do not over-tighten.
- 7 Secure the copper tube to your refrigerator's rear panel with a steel clamp and screw (see illustration).
- 8 Coil the excess copper tubing (about 21/2 turns) behind your refrigerator as shown. Arrange coiled tubing to avoid vibration or wear against other surfaces
- 9 Open water supply shut-off valve and tighten any connections that leak.

NOTE

 The ice maker's fill valve may operate noisily if the household water supply is shut off. • After ensuring no water leaks exist at any connection, be sure to check for leaks again in 24 hours.

4 Place In Permanent Position

IMPORTANT

If possible, use a hand truck to position the refrigerator directly in front of its cabinet enclosure. Be careful not to move the refrigerator beyond its water supply (copper tubing) connections.



Plastic Water

Clam

- Fernik

(Sleeve


water line


Water Valve Bracke


/alve Inle

(Include enough tubing in loop to allow moving refrigerator out for cleaning.)

- Shifting the refrigerator from side to side may damage flooring.
- Do not block the toe grille on the lower front of your refrigerator. Sufficient air círculation is essential for proper operation.

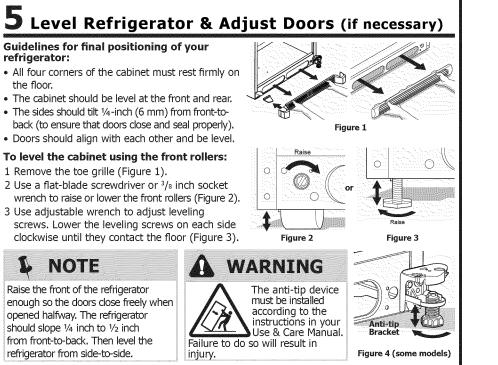

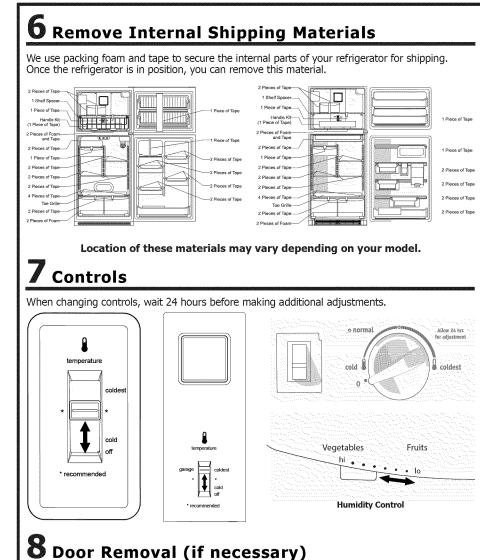

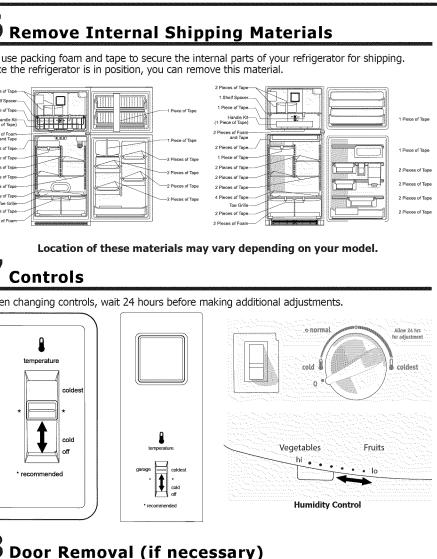







Levelina

Refrigerator is level, side to side and tilted 1/4" (6mm) front to back П Toe grille is properly attached to refrigerator □ Cabinet is setting solid on all corners **Electrical Power**


□ House power turned on Refrigerator plugged in


Not satisfied with the installation of your refrigerator? \triangleright Please contact the store from which you purchased your refrigerator.

NOTE

If you need to remove the doors to get your refrigerator into the house, please see "Door Removal Instructions" in your Use & Care Manual.







☑ Installation Checkoff List

□ Handles are secure and tight Door seals completely to cabinet on all sides □ Freezer door is level across the top

Ice Maker

- House water supply connected to refrigerator
- П No water leaks present at all connections - recheck in 24 hours
- □ Ice Maker is turned ON.

Final Checks

- Shipping material removed
- Fresh Food and Freezer controls set
- Crisper Humidity controls set
- Registration Card sent in