



BLOWER / ROUGH-IN KITS & DUCTING ACCESSORIES

For use with
Best by Broan
K210A, PIK33, & PIK45
Series Range Hoods



Model P5 Blower Rough-in Kit

- 500 cfm, 120 VAC, 1.8 Amps
- Interior-mounted, single-wheel design
- Attaches to rough-in plate independent of hood
- Includes rough-in kit, with flow-deviator and damper adaptor
- Uses 3 1/4" x 10" rectangular or 8" round duct

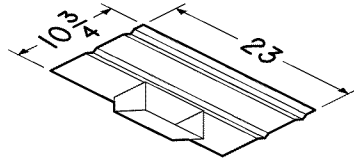


Model P8 Blower Rough-in Kit

- 850 cfm, 120 VAC, 3.4 Amps
- Interior-mounted, single-wheel design
- Attaches to rough-in plate independent of hood
- Includes rough-in kit, with flow-deviator and damper adaptor
- Uses 3 1/4" x 14" rectangular or 8" round duct

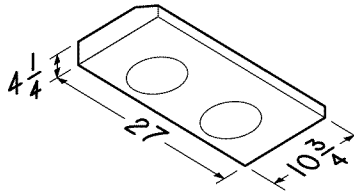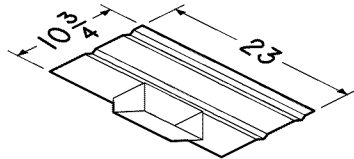

Model 634 Roof Cap


- 24 GA. CRCQ steel, black electrically-bonded epoxy finish
- Built-in backdraft damper and bird screen
- For 3 1/4" x 10" or up to 8" round duct

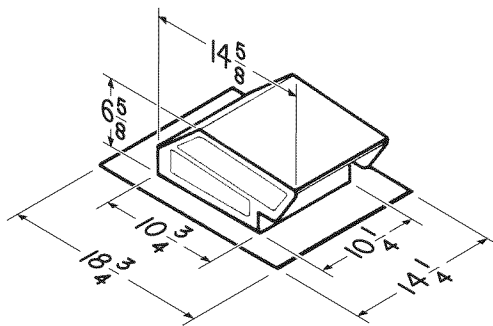


Model 644 Roof Cap

- Same as Model 634 except .025 aluminum
- Natural finish


Model 412 3 1/4" x 10" to 7" Round Adjustable Elbow




Model 413 3 1/4" x 10" to 8" Round Adjustable Elbow



Model T460 3 1/4" x 14" to 7" Round Transition




Model 459 3 1/4" x 14" to 8" Round Transition



Model WC638 Wall Cap

- For 3 1/4" x 14" duct
- Spring-loaded backdraft damper and bird screen
- 26 GA. CRCQ steel, black finish



Best by Broan, P.O. Box 140, Hartford, Wisconsin 53027


REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted By
			Date




PERFORMANCE RATINGS

For use with Best by Broan K210A, PIK33, & PIK45 Series Range Hoods


P5 (Horizontal)

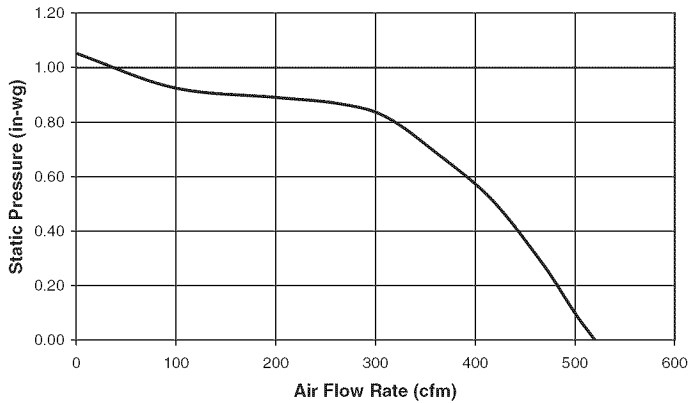


P5 (Vertical)

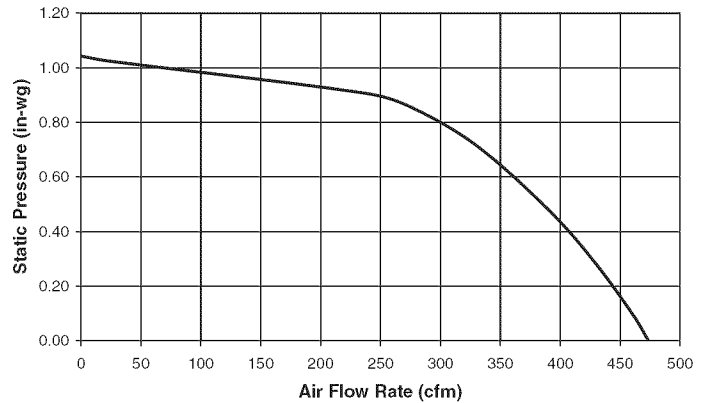

P8 (Horizontal)

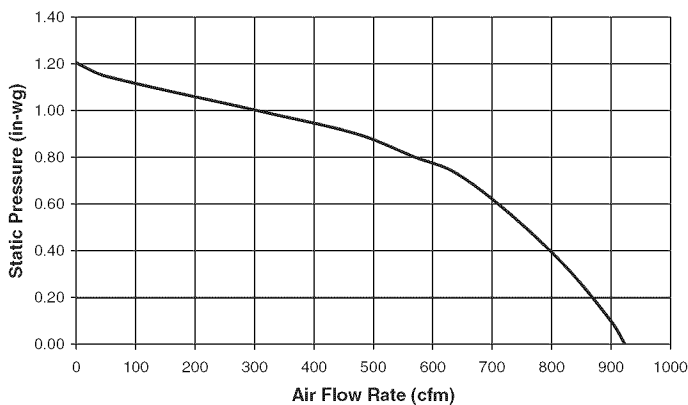

P8 (Vertical)

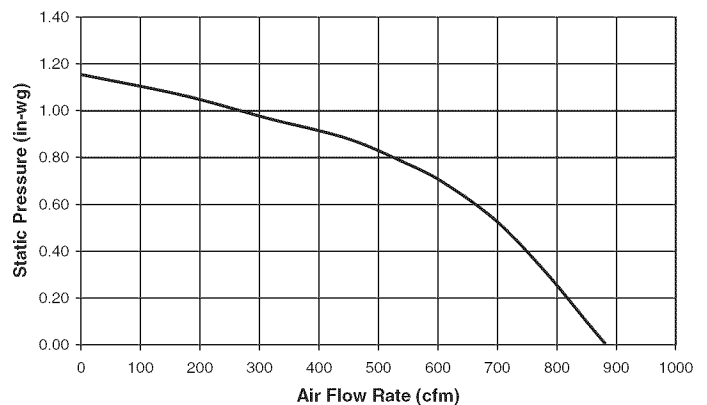

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.