

# Instruction Sheet for Replacement of Glass Washer Lid

Contains:  
1 Lid  
1 Instruction Sheet

1. Open lid to the fully open position.
2. Using a T15 driver, remove the 4 screws that attach the lid to the hinge wire. See *Figure 1*.

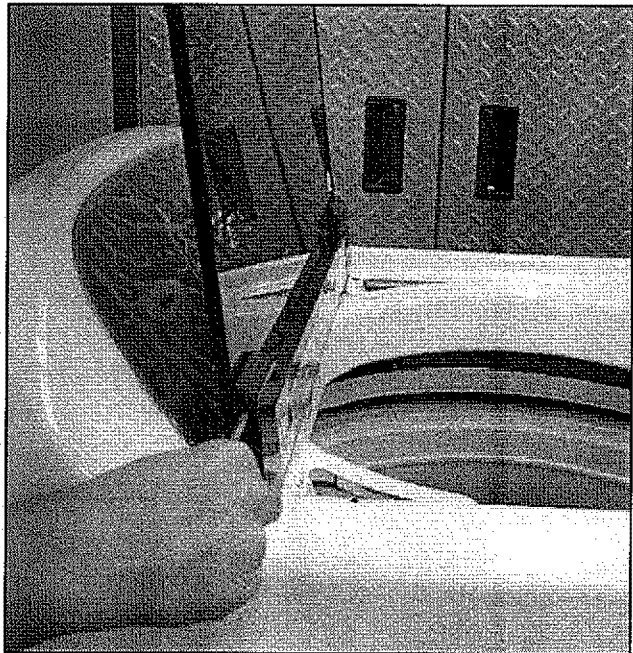


FIGURE 1

3. Pull up evenly on both sides of the lid to avoid bending the hinge wires.
4. With the hinge wires in the full upright position, slide the new lid onto the hinge wires. See *Figure 2*.

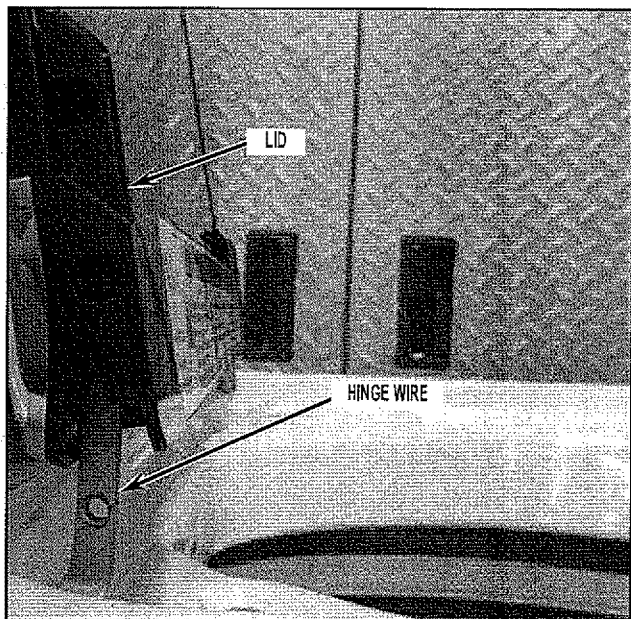


FIGURE 2

**IMPORTANT:** To prevent damage to the new lid, keep the lid in the full open position until all 4 screws are installed and fully tightened.

5. Hold the lower portion of the lid to align the hole in the lid to the hole in the hinge wire. See *Figure 3*.

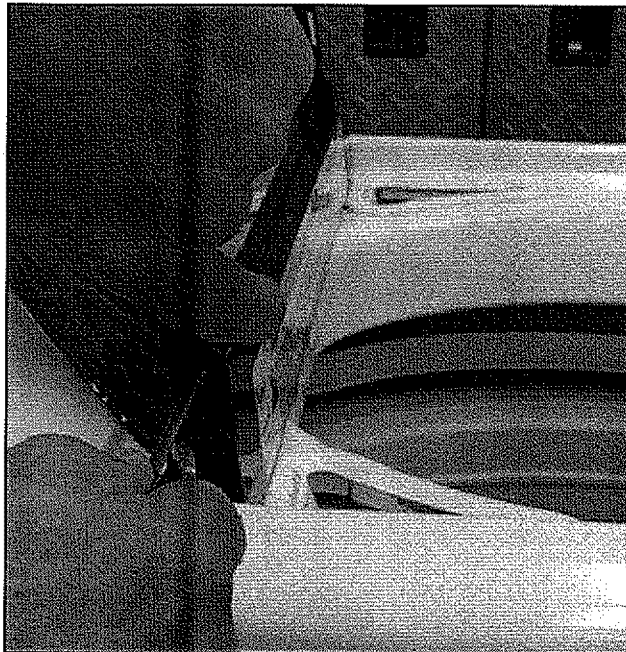


FIGURE 3

6. Install the 2 upper screws first, and then install the 2 lower screws.
7. Tighten all screws securely.
8. Close and open lid to insure that it operates correctly.