


46" GAS DROP-IN COOKTOP **E46GC67ESS**

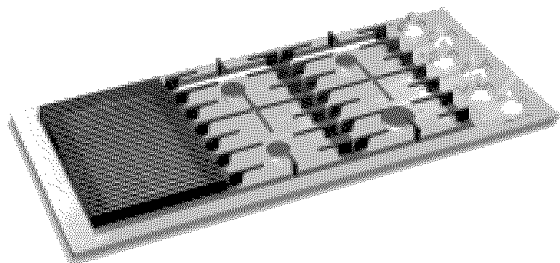

### 46" Gas Drop-In Cooktop Specifications

- Product Weight – 91 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amp
- Always consult local and/or national electric and gas codes.
- Access to the underside of cooktop and junction box must be provided for inspection and service.
- Cooktop ships with 3/4" factory regulator.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Recommended distance from rear edge of cooktop to nearest vertical combustible surface is 2-1/2" to backsplash or 3-1/8" to rear wall.
- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Allow 2-1/2" minimum clearance between bottom of cooktop chassis and all combustible surfaces including upper edge of drawer installed beneath cooktop.
- Beneath cooktop, allow 46" minimum width between cabinet sidewalls.
- A fixed shelf or drawer should not be installed beneath cooktop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

Note: Refer to Product Installation Guide for detailed instructions on the web at [www.electroluxusa.com](http://www.electroluxusa.com).

### 4 Sealed Burner Configuration

Four high output burners, one 14,000 BTU, one 12,500 BTU and two 8,500 BTU make this compact, drop-in cooktop seem larger than it is. The burners are sealed for easy cleanup.

### Flush Surface

The smooth, flat stainless steel surface beneath the cooking grates allows for quick and easy cleaning and buffs to a glossy shine.

### Interlocking Grates

Interlocking grates spread weight over a broad area providing an ultrastable cook surface.

### 13" Grill Grate

Capture the flavors of the great outdoors without ever leaving your kitchen. The 10,000 BTU grill adds power and flexibility to your culinary palette.

### 46" GAS DROP-IN COOKTOP

Configuration	4 Sealed Burners / Grill
<b>FEATURES</b>	
Formed Stainless Steel Platform	Yes
Large Professional Skirted Knobs with Bezel	6
Sealed Burner – 14,000 BTU	1
Sealed Burner – 12,500 BTU	1
Sealed Burner – 8,500 BTU	2
Simmer Burner – 850 BTU	Yes
Grill Burner – 10,000 BTU	1
Linear Flow Burner Valves	6
Electronic Ignition with Auto Re-Ignition	Yes
Interlocking Grates	2
13" Grill Grate	1
<b>SPECIFICATIONS</b>	
Gas Inlet Location	Right Rear
LP Conversion Kit	Included
Voltage Rating	120V / 15 Amp
Electrical Cable	Included
Shipping Weight	96 Lbs.

NOTE: Always consult local and / or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [www.electroluxusa.com](http://www.electroluxusa.com).

