

48", 46", 36", 30", DOWNDRAFT
E48DD75ESS, E46DD75ESS, E36DD75ESS, E30DD75ESS



Downdraft Specifications

- Electrical Requirements – 120 Volts AC, 15 or 20 Amps, 60 Hertz
- Single phase 3-wire, 120 Volt, 60 Hertz AC only electrical supply with ground required.
- Always consult local and/or national electric codes.
- Vent unit outside of building only.
- Vent must be installed in vertical orientation only.
- 1,600 CFM remote exhaust blower included with vent.
- Do not use flexible duct. Round duct instead of rectangular duct recommended, especially when elbows are required.
- When multiple elbows are necessary, ensure a minimum of 24" of straight duct between any two elbows.
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Cold weather installations should have additional backdraft damper installed.
- For vent installation refer to Countertop Preparation illustration. Minimum flat countertop area must meet or exceed combined overall width and depth as shown.

Note: Refer to Product Installation Guide for detailed instructions on the web at www.electroluxusa.com.

DOWNDRAFT

Size	48"	46"	36"	30"
Installation Type	Countertop Mounted	Countertop Mounted	Countertop Mounted	Countertop Mounted
Air Discharge	Down	Down	Down	Down
Air Delivery	1600 CFM	1600 CFM	1600 CFM	1600 CFM
Intake Area	10"	10"	10"	10"
Controls	Dial	Dial	Dial	Dial
Infinite-Speed Blower	Yes	Yes	Yes	Yes
Dishwasher Safe Aluminum Filters	Yes	Yes	Yes	Yes
Exhaust Duct	External	External	External	External
Diameter of Duct	3-1/4"	3-1/4"	3-1/4"	3-1/4"

SPECIFICATIONS

Electrical – 120 V AC/60 Hz/ 15 or 20 Amps	Required	Required	Required	Required
Shipping Weight	69 Lbs.	69 Lbs.	55 Lbs.	48 Lbs.
UPC (0-12505-)	53953-4	53952-7	53951-0	53950-3

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at www.electroluxusa.com.

Slim Style

Designed to work in perfect harmony with your 30", 36" or 46" Electrolux ICON™ gas or electric cooktop.

Infinite-Speed Blower

The ultra-quiet blower allows you to dial in the precise blower speed needed.

Removable, Easy-Clean Filters

Filters are easy to remove and clean in your dishwasher to restore to like-new condition.

10"-High Intake

When activated, the downdraft vent rises 10" to capture even the most stubborn cooking odors.


Venting Options

Can be vented through wall or roof.

Cubic Feet Per Minute Air Delivery

1600 CFM system to match your cooktop's output.

E48DD75ESS	E46DD75ESS	E36DD75ESS	E30DD75ESS
48"	46"	36"	30"
Countertop Mounted	Countertop Mounted	Countertop Mounted	Countertop Mounted
Down	Down	Down	Down
1600 CFM	1600 CFM	1600 CFM	1600 CFM
10"	10"	10"	10"
Dial	Dial	Dial	Dial
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
External	External	External	External
3-1/4"	3-1/4"	3-1/4"	3-1/4"
Required	Required	Required	Required
69 Lbs.	69 Lbs.	55 Lbs.	48 Lbs.
53953-4	53952-7	53951-0	53950-3

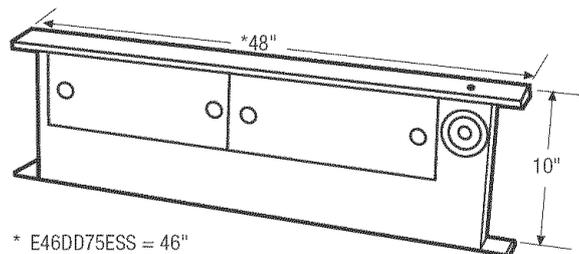

* E46DD75ESS = 46"
E36DD75ESS = 36"
E30DD75ESS = 30"