
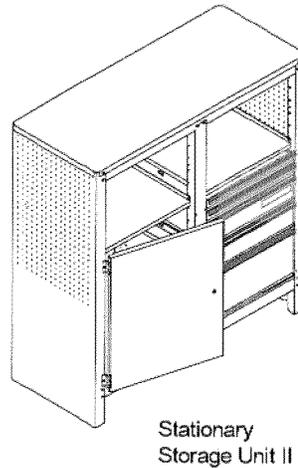


CRAFTSMAN®

Owner's Manual

STATIONARY STORAGE UNIT

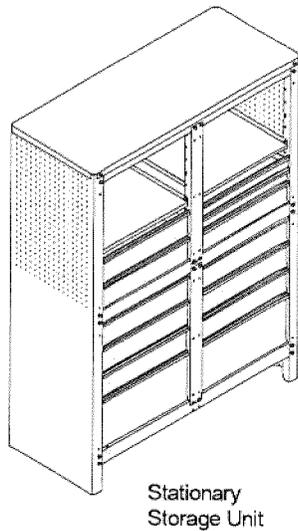

CAUTION:

Read and follow all Safety Rules and Operating Instructions before first use of this product.

Sears, Roebuck and Co., Hoffman Estates, IL 60179 USA

Made in the U.S.A.
F907A1

SAFETY

WARNINGS AND CAUTIONS:

- **DO NOT** stand on this product. You may fall which may cause personal injury.
- **WEAR SAFETY GLASSES AND GLOVES** when cutting the banding material. The bands may snap which may cause personal injury.
- **BE CAREFUL** when opening more than one drawer. The product may become unstable and tip, which may cause personal injury or product damage.
- **DO NOT** mount this product on a truck bed or any other moving object. This may cause personal injury or product damage.
- **DO NOT** step in the drawers. You may fall which may cause personal injury.
- Appropriately secure this product before moving it with a forklift.
- **DO NOT** alter this product in any manner. For example, do not weld external lockbars or attach electrical equipment. This may cause product damage or personal injury.
- Close the drawers and doors before moving this product. The drawers or doors could come open and make the product unstable and tip, which may cause personal injury or product damage.
- The maximum weight for each drawer should be no more than 50 pounds.
- Weight limit on the top of the workbench is 1,000 pounds. If the limit is exceeded, the product could collapse and cause personal injury or product damage.

PARTS:

STATIONARY STORAGE UNIT

KEY	DESCRIPTION	QTY.
A	SIDE	2
B	CENTER SUPPORT	4
C	9" DRAWER ASSY.	2
D	4" DRAWER ASSY.	9
E	2" DRAWER ASSY.	2
F	RAIL	6
G	SHELF	2
H	TOP	1

NOTE: Slides not shown .


STATIONARY STORAGE UNIT II

KEY	DESCRIPTION	QTY.
A	SIDE	2
B	CENTER SUPPORT	2
C	9" DRAWER ASSY.	1
D	4" DRAWER ASSY.	2
E	2" DRAWER ASSY.	2
F	RAIL	4
G	SHELF	2
H	TOP	1

NOTE: Varies slightly from picture. Slides and door not shown.

Call 1-800-366-7278 for Service Parts

Refer to Service Parts Drawing for full listing of Service Parts

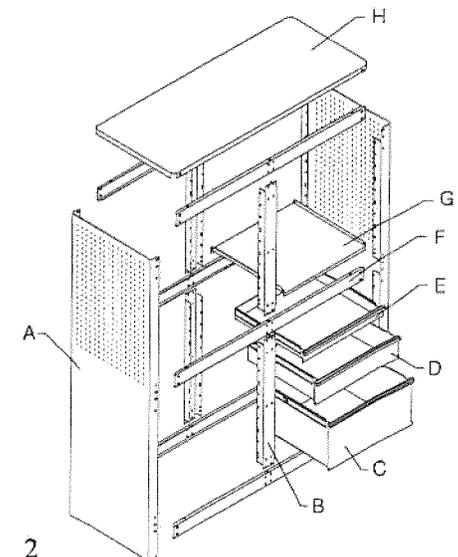

HARDWARE:

(Hardware dependant on model)

-  1/4-20 Hex Nut
-  1/4-20 X 1/2 Slotted Screw
-  1/4-20 X 1/2 Tamper Proof Screw
-  1/4-20 X 7/16 Hex Screw


ASSEMBLY

These instructions pertain to two units. Most of the steps relate to both units; however, the specific unit will be called out if the assembly belongs only to it.

RAIL AND CENTER SUPPORT ASSEMBLY:


STATIONARY STORAGE UNIT:

This unit has six rails and four center supports. Attach the center supports (B) to the center of the rails (F) using sixteen 1/4-20 x 7/16 hex screws and sixteen 1/4-20 hex nuts. Finger tighten.

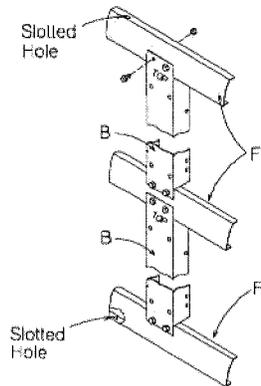

STATIONARY STORAGE UNIT II:


This unit has four rails and two center supports. Make sure that the slots in the top rail are on top and the slots in the bottom rail are down, and that the word "Top" on the center supports is toward the top. Attach the center supports (B) to the rails (F) using two 1/4-20 x 7/16 hex screws and two 1/4-20 hex nuts per joint. Finger tighten.

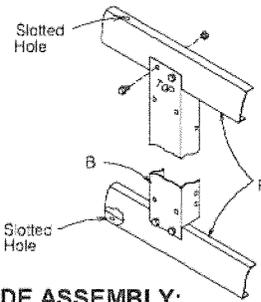


SIDE ASSEMBLY:

NOTE: Do not insert screws in the top holes of the side and rail assemblies until the top is in place.

- Attach the rail and center support assembly to the side using one 1/4-20 x 7/16 hex screw and one 1/4-20 nut per corner at the top joints. Attach the bottom joints with two 1/4-20 x 7/16 hex screws and nuts. **NOTE: For Stationary Storage Unit attach the middle rails to each side with two 1/4-20 x 7/16 hex screws and nuts per joint. Finger tighten.**

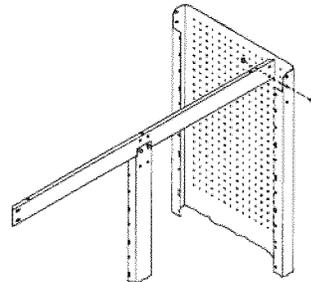


- The open areas between the center supports (B) and sides (A) must measure 18 1/2" for proper fit of the drawers. Square up the frame and wrench tighten the screws.

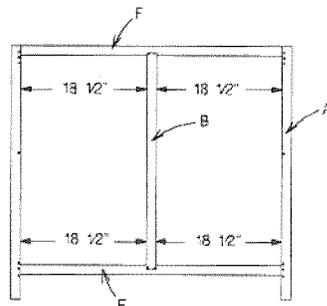

3

SLIDE ASSEMBLY:


NOTE: These units are designed so that the drawers and shelves may be positioned to suit your needs. During installation of the slides, start at either the top or the bottom of the unit and work toward the other end.

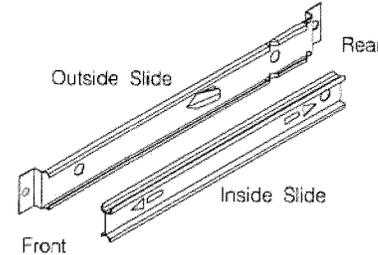

- Place the rear of the outside slide at the rear of the unit, line up the holes and attach the slide with two 1/4-20 x 7/16 hex screws and two 1/2-20 hex nuts. Finger tighten. Attach the remaining slides leaving a gap between them according to the drawer size.
- Before installing the inside slide, lubricate the top and bottom channels of the outside slide.
- Guide the inside slide into the channel at the front end of the outside slide. Firmly push the inside slide past the slide stop on the outside slide. Repeat this step for the remaining slides.

TOP ASSEMBLY:


- Place the top (H) on the rail and side assembly, line up the four holes and attach the top using four 1/4-20 x 7/16 hex screws and 1/4-20 hex nuts.

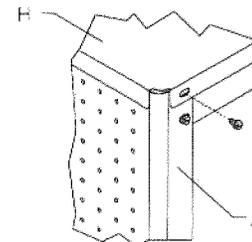

- Wrench tighten all screws and nuts.
- Move the unit to a permanent location.

DRAWER INSTALLATION:

- Before installing the drawers, lubricate the top and bottom channels of the drawer slides.

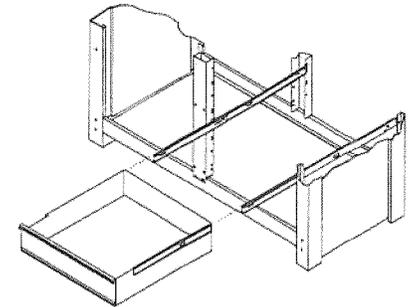


- Install the drawer by inserting the drawer slides into the installed slide assemblies. Make sure that the slides on both sides line up. Push the drawer until it is fully closed. The drawer is now securely in place. Repeat the procedure for the remaining drawers.

NOTE: Door, lock, and door catch assemblies are for Stationary Storage Unit II only.

DOOR ASSEMBLY:

NOTE: The door may be mounted on either side of the unit. CAUTION: Once the door hinge screws are tightened they cannot be removed with a screwdriver.

- The door catch, lock, and mounting hardware is in a separate bag.
- Remove the knockouts from the front end panel on the side that the door is to be hung.
- Position the door on the side of the work bench opening selected and line up the holes on the hinge and the bench front.

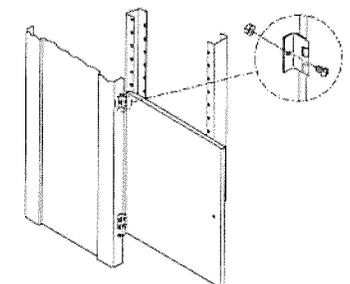


4

- Attach the door with two 1/4-20 tamper proof screws and two 1/4-20 hex nuts. Finger tighten. Do not wrench tighten until the door lock is adjusted to the door catch.

LOCK ASSEMBLY:


- Insert the lock assembly (keeping the locking cam vertical) into the rectangular hole on the door.
- Position the retaining clip in the slots of the lock on the inside of the door.
- Strike the flat edge of the clip with a mallet to seat.

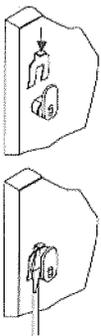

- To remove the lock use a screwdriver to drive out the retaining clip.


DOOR CATCH ASSEMBLY:

- Mount the door catch opposite the door hinge in the upper hole with one 1/4-20 round head machine screw and one 1/4-20 hex nut.
- Square up the door and the catch. Wrench tighten all of the screws.

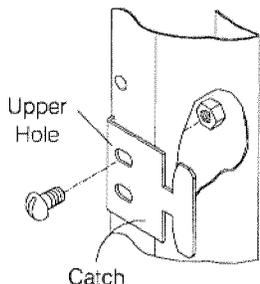

SHELF ASSEMBLY:


- Find a desired location for the shelf, line up the four holes in the shelf with the holes in the side and center support. Attach the shelf using four 1/4-20 x 7/16 hex screws and four 1/4-20 hex nuts. Wrench tighten. Repeat the procedure with the other shelf.

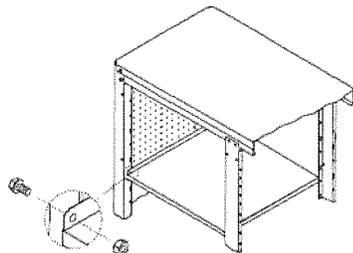

OPERATION

REMOVING AND INSTALLING DRAWERS:

- Fully extend the drawer. Then push it back a fraction of an inch.
- Insert a screwdriver into the slot in the slide and depress the stop until it clears the lance. Repeat the procedure for the other slide. Remove the drawer.

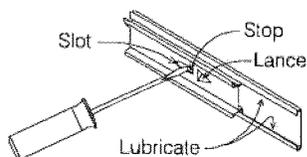

- To reinstall the drawer, pry the stop far enough out to engage the lance (3/16" to 1/4") and push the drawer onto the slides until the stops pass over the lances.

MAINTENANCE

- An auto wax will preserve the storage unit's high luster finish. Apply the wax as to a car. The wax will help protect the unit against scratches.
- Lubricate slides twice yearly.
- Grease and oil can be removed with most standard cleaning fluids. For safety, use a non flammable cleaning fluid.

INTENTIONALLY LEFT BLANK