
Quiet Zone Room Air Conditioner

50 Hz Use And Care Manual

Contents

Electrical Requirements	2
Electrical Grounding Instructions	
Safety Features	
Compressor Lockout	
Low Voltage Protection	
Advantages of Amana's Electronic Controls	
Operation	
Vent Control	
Unit Control	
General Information	
Changing Air Flow Direction	
Air Flow Around Unit	
Care and Maintenance	
Air Filter	
Before Calling For Service	
Fan Motor	
Slide out Chassis	
Model Identification	8
Any Questions?	



Please read this Use and Care Manual thoroughly. This manual provides proper maintenance information for maximum benefit of the features selected.

WARNING -

To avoid death, personal injury or property damage due to overheating, do not leave this room air conditioner unattended when used as cooling or life support for persons or animals unable to react to unit failure. Take precautions to warn or guard against such an occurrence.



Electrical Requirements

Electrical Grounding Instructions

This appliance is equipped with a three-prong grounding plug for protection against possible shock hazards. If a two-prong wall receptacle is encountered, the customer is required to contact a qualified electrician and have the two-prong wall receptacle replaced with a properly grounded three-prong wall receptacle in accordance with the National Electrical Code.

Room air conditioners are designed to operate according to requirements on the nameplate and as shown in Figure 1. Fuse or circuit breaker ratings must be according to the fuse instruction label and as shown in Figure 1. Do not plug models marked "Use on Single Outlet Circuit Only" into a circuit with another appliance or light fixture.




WARNING -

To avoid death, personal injury or property damage due to electrical shock, this unit must be grounded. Do not under any circumstances cut or remove the round grounding prong from the plug. Do not use a two-prong adapter.



WARNING -

To avoid death, personal injury or property damage due to electrical shock, do not use an extension cord. Do not pinch the power cord. Do not remove the warning tag from the power cord.

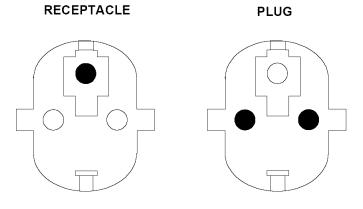

250 V - 16 AMP

Figure 1

Safety Features

This room air conditioner is equipped with an electronic control to improve comfort and ensure reliability.

Compressor Lockout

To extend the life of the compressor a three minute time delay will occur when:

- Electrical power is first supplied to the unit
- The thermostat is turned down immediately after the compressor stops running.
- The Fan Control is quickly turned from FAN ONLY to COOLING mode or vice versa.

Low Voltage Protection

This unit is equipped with "brownout" protection. In case of an extreme brownout, the Amana control will interrupt power to the unit to prevent compressor failure. When the line voltage reaches at least 180 VAC, the control will reenergize your unit.

Note: A compressor lockout will occur after the unit is re-energized.

Advantages of Amana's Electronic Controls

·Digital Temperature Setting

- Temperature can be set from 16°C to 32°C in 1°C increments
- •Digital Temperature Display
- Shows indoor room temperature in FAN ONLY mode
- Shows desired temperature setting in other modes
- Computer Memory that Remembers
- The unit remembers the last settings used when last turned on.
- •TempAsure® Thermostat
- Maintains set temperature within 1.0°C for maximum comfort
- ·Smart Cool
- •Energy Saver with TempAsure® air sampling
- Delay Timer

Operation

Vent Control



Open or close the vent by sliding the vent control lever to the appropriate setting.

EXHAUST - This setting opens the vent to move indoor air out.

Note: To conserve energy, the unit should be set to the FAN ONLY mode when using this setting.

CLOSED - In this position the vent is closed and room air is recirculated and filtered. This position should be used for all normal cooling operations (see underlined cooling options on control panel).



ENERGY SAVER (HIGH, MED and LOW) -ENERGY SAVER mode provides the most energy efficient use of your room air condi-

tioner. I nENERGY SAVER mode, the fan stops when the compressor stops cooling. This feature can be used with SMART COOL or cooling with any fan speed.

Amana's new air sampling system works to maintain set temperature within 1.5°F while in ENERGY SAVER mode. Approximately every 5 minutes the fan will turn on and "sample" the room air to determine if cooling is needed. If the room is cool enough, the fan will cycle off. If the room needs further cooling, the compressor will start along with the fan until the set temperature is reached.


ENERGY SAVER has a soft start fan feature. This feature starts the fan in low speed to reduce noise.



FAN ONLY - FAN ONLY circulates room air at the set fan speed without cooling. This feature can be turned off by pressing the FAN

ONLY, the SMART COOL, or the ENERGY SAVER button. Indoor temperature is displayed in FAN ONLY mode.

Unit Control



Control Panel



OFF - Completely shuts off the unit.



SMART COOL - SMART COOL adjusts the fan speed of the unit to achieve the selected temperature. The SMART COOL feature uses computer logic to cool the room quickly

and quietly. The fan speed starts on high, automatically switches to medium, and finally goes to low as the room temperature nears the set temperature.



LOW FAN, MED FAN, HIGH FAN

- These three buttons are used to select either a low, medium or

high fan speed to cool. If FAN ONLY is selected these buttons change fan speed without cooling. Selecting the fan speed starts normal cooling.



SET Temperature - These key pads increase or decrease the set temperaure.

DELAY TIMER

DELAY TIMER - This button provides a means of delaying the start up or shut down

of the air conditioner from 1 to 24 hours from the present time. After setting the delay timer, the displayed time will countdown to unit start or stop. See next page for details.

DELAY START OPERATION

Note: Changes can be made only while display is flashing. You will have **5 seconds** between each temperature, operating mode, and fan speed selection. If a selection is not made during this time frame, the unit will select the default and proceed to the next step: Setting the delay time. If you wish to reset a missed selection, press the DELAY TIMER button and begin again.

Procedure	Button	Display Indicator
1 Turn the unit off.	OFF	
2 Press the DELAY TIMER button.	DELAY	• The current temperature setting will flash.
3 Select the desired temperature,	♥ SET △	18
operating mode, and	SMART COOL ENERGY SAVER ONLY	Display and selected setting lights will flash. The display will show the current temperature setting.
fan speed.	LOW MED HIGH FAN	
4 Press the DELAY TIMER button.	DELAY	• The current delay time will flash.
5 Change the delay time, if desired. Note: The minimum setting	∇ SET △ If for the timer is 1 hour	up to
6 Press the DELAY TIMER button to start the time or select nothing and the unit will start automatically.	DELAY	The display will show the countdown time to activation.

DELAY STOP OPERATION **

Procedure	Button	Display Indicator
1 With unit running, press the DELAY TIMER button.*	DELAY	Displayflashes
2 Change the delay time, if desired.	▽ SET △	up to 24
Press the DELAY TIMER button to start the time or select nothing and the unit will start automati- cally.	DELAY	The display shows the countdown hours.
4 To cancel, press the DELAY TIMER or OFF button	DELAY TIMER Or OFF	

^{*}A setting must be selected within a 5-second time period, while flashing, or the unit will select the default as the new setting.


Note: If a power failure occurs, the last delay settings will be lost and the default setting will be active.

^{**}If there is no loss of power, the unit will keep the last setting.

General Information


Changing Air Flow Direction

- Adjust horizontal baffles for directing air up or down
- Adjust vertical baffles with handle to direct air left or right



Air Flow Around Unit

Check indoor grille and outdoor louvers for air flow obstructions. Do not block air flow to and from unit. The outdoor coil should be checked and periodically cleaned for debris that



may collect and block unit air flow. If air flow is obstructed or deflected back into unit, the compressor may cycle on and off rapidly, causing early compressor failure.

Care and Maintenance



WARNING -

To avoid death or personal injury due to electrical shock, turn fan control off and unplug power cord before cleaning or performing maintenance. After cleaning or performing maintenance, reconnect power.

Note: The unit should be inspected by an authorized servicer once a year to ensure proper function of the unit.

- 1. Once a year, remove chassis from outer case and thoroughly clean air conditioner.
- 2. Wash air conditioner with warm, soapy water as needed. Rinse and dry thoroughly.
- 3. If using concentrated liquid detergent, dilute in warm water first.
- 4. Do not use abrasive cleaners such as Comet™, Ajax™, etc. These items can scratch, crack, and discolor surfaces.


Oceanside or Corrosive Environment

Salt air or a corrosive environment may greatly reduce the life of the unit. After cleaning, sand and repaint any scratches or blisters on painted surfaces. In humid areas where algae formation is common, place an algaecide tablet in outdoor side of unit base pan.

Air Filter


The front contains a removable grille that provides easy access to the air filter. The filter can be removed two ways: METHOD ONE:

Grasp the filter handle and slide the filter to the left until it clears the unit.



METHOD TWO:

- 1. Remove the front grille.
 - Slide the grille to the left until it clears the unit clips and pull out.
- 2. Grasp the filter handle and slide the filter to the left until it clears the unit clips and pull out.



NOTE: A charcoal air purification filter accessory is available that reduces smoke, odor, pollen, and fine dust particles. See your store dealer for details or call Amana at 1-800-843-0304.

IMPORTANT NOTE: A dirty air filter reduces operating efficiency. Inspect filter at least once every week during operation. Clean filter with a vacuum cleaner or warm, soapy water. Thoroughly dry filter before replacing. Do not operate unit without filter.

Fan Motor

Fan motor is permanently lubricated so there is no need to oil motor.

Slide out Chassis

Some models feature a slide out chassis for easier installation. Refer to Installation Instructions provided with unit for details on removing chassis from outer case.

Reinstall air filter by reversing above procedure.

Before Calling For Service

Difficulty	Possible Cause	Suggested Solution
Air conditioner will not operate.	No power to unit.	Set fan control to position other than off.
		Confirm power cord is plugged in.
		Check fuse or circuit breaker.
Little or no cooling.	Compressor lockout on initial plug-in.	Wait 3 to 4 minutes and recheck compressor.
	Dirty air filter.	Clean air filter.
	Air conditioner undersized for application.	Check with dealer to determine proper unit capacity for application.
	Power interruption or changing unit settings.	Let fan run. Compressor will automatically restart in approximately 3 to 4 minutes.
Noisy unit.	Loose parts.	Tighten any loose parts.
	Weak building construction.	Provide additional support.
	Water hitting fan blade.	Normal in high humidity.
Mounting support cannot be installed.	Storm window frame has been installed into window.	Some models require the window sill to be adapted to accept the mounting support. Refer to Installation Instructions provided with the unit for details.
Odors in cooling.	Mold, mildew or algae formation on wet surfaces.	Place algaecide tablet in base pan.
Water in base pan.	Water in base pan is picked up by the fan blade and thrown onto the warm outdoor coil where the water then evaporates.	Normal in high humidity.

Model Identification

Complete enclosed registration card and promptly return card to Amana's Product Registration department.

When contacting Amana, provide product information. Locate product information on the nameplate, found underneath front grille. Record the following information:

Model Number:
Manufacturing Number:
Serial or S/N Number:
Date of purchase:
Dealer's name and address:

Keep a copy of sales receipt for future reference or in case warranty service is required. If something is operating incorrectly, read "Before Calling for Service" section.

Any Questions?

Most of your questions can be answered by your local Amana dealer. Check with your dealer first if you need any further information regarding the operation, maintenance, or service of your unit.

Amana is pleased to offer long-term service protection on this new room air conditioner. Asure™ Extended Service Plan is specially designed to supplement Amana's strong warranty. Asure™ provides budget-protecting coverage on room air conditioner for up to five full years and includes parts, labor, and travel charges. Check with your Amana dealer for details on the Asure™ Extended Service Plan.